

COUVERTURE

Tôle TOITESCO 1000.4.42 N

Traitement de surface : Galvanisée et prélaquée.

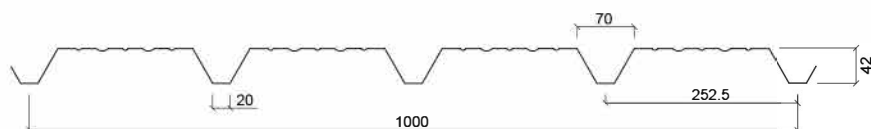


Tableau de charge maximal uniformément répartie kg/m²: Deux appuis

	Portée en (m)				
Epaisseur	1,9	2,1	2,45	2,65	2,75
0,7	270	200	125	-	-
0,8	270	215	140	115	-
1	270	270	165	125	115

Tableau de charge maximal uniformément répartie kg/m²: Trois appuis

	Portée en (m)				
Epaisseur	2,05	2,5	2,65	2,75	2,95
0,7	270	200	160	150	125
0,8	270	225	180	175	140
1	270	250	215	200	150

Poids et Epaisseur			
Epaisseur (m)	0,7	0,8	1
Poids (kg/ml)	6,97	8,18	9,29

RAL 1015



RAL 9010



RAL 9002



RAL 9006



RAL 9007



RAL 5019



Plusieurs coloris disponibles selon le volume.